


Dong Chau Construction Environment Ltd., Co
16/27A Dinh Tien Hoang Street, Dakao Ward, District 1 Ho Chi Minh city
Tel: +84 8 62702191 Fax: +84 8 39107692
Email: Sales@dongchau.net Web: www.dongchau.net



www.dongchau.net

PANEL - HEPA AIR FILTER
Meet Your All Requirement

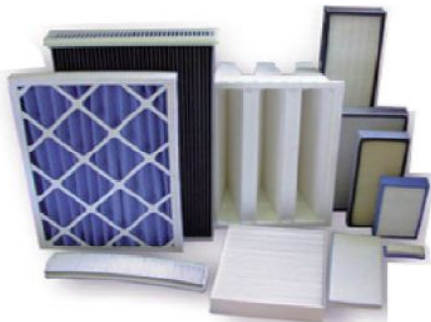




www.dongchau.net

Blank Temperature Resistance Pre-Filter

Features:

Thin structure
 High dust holding capacity
 Economical and practical
 High temperature resistance
 Fiber glass have no breaking or shedding

- Type: Plank temperature resistance filter
- Frame: aluminum alloy, stainless steel or galvanized iron frame
- Media: special Synthetic fiber, fiberglass
- Protect mesh: aluminum or stainless steel mesh
- EN779 class: G3,G4,G5
- Average arrestance: 88%,99%,93 % (ASHRAE52.1-1992)
- EUROVENT4/5 class: EU3,EU4,EU5
- Final resistance: (suggest)250Pa-300Pa
- Max. air flow: 125% of the rated air flow
- Temp. Resistance:300⁰ C
- Humidity: 80%

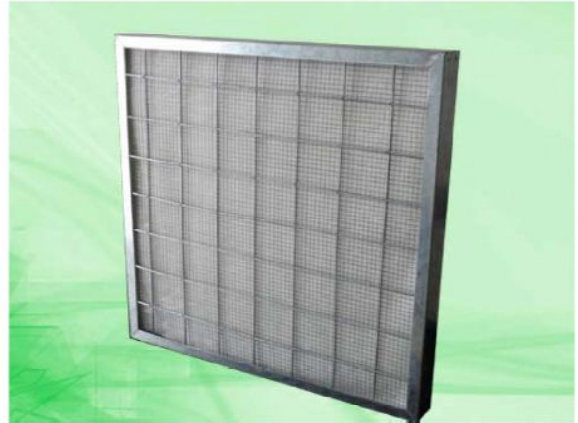

Application:

Avoid tar, coom and dust from high-temperature dryer

Order information:

Type	Dimension			Rated air flow(m3/h)	Initial pressure drop (Pa)
	Height(mm)	Width(mm)	Thickness(mm)		
FRS-GW-1	592	592	10	1800	40
FRS-GW-2	592	292	10	850	
FRS-GW-3	592	592	20	1800	60
FRS-GW-4	592	292	20	850	

Special sizes available upon request.