


Dong Chau Construction Environment Ltd., Co
16/27A Dinh Tien Hoang Street, Dakao Ward, District 1 Ho Chi Minh city
Tel: +84 8 62702191 Fax: +84 8 39107692
Email: Sales@dongchau.net Web: www.dongchau.net



www.dongchau.net

PANEL - HEPA AIR FILTER
Meet Your All Requirement

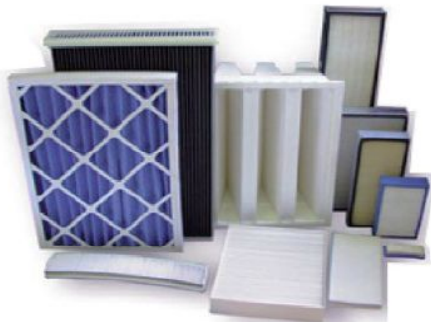



www.dongchau.net

Medium Efficiency Anti-Static Pocket Filter

Features:

Large dust holding capacity
High efficiency
Good air permeability
Long working life

- Type: pocket filter
- Frame: aluminum alloy or stainless steel
- Media: Synthetic fiber
- EN779 class: F5,F6,F7,F8,F9
- Temp. Resistance: 100 degree Celsius
- Humidity: 100%
- Speciality: Galvanized iron or aluminum alloy frame
- Between each pocket there is a metal stick to make frame firm, and the separation material of each pocket can avoid the filter over expanded under the pressure.
- Ultrasonic sealing make the filter more strong and not easy to break.
- Adopted fine synthetic fiber instead of some fiberglass material.
- Material is made of antistatic fiber, large dust holding capacity and long working life.
- Pocket mesh efficiency has five different types for choice: 35%,45%,65%,85%and 95%

Application:

The air pre-filtration system for non-dust room, hospital, pharmaceutical factory, electronics factory, spray booth and other filtration systems which are in high need of clean air.

Order Information:

F5 grade:





www.dongchau.net

Type	Dimensions(mm)				Rated air flow(m ³ /h)&Pa			Filtering area	EN7 79	Color
	Width	Height	Depth	Bags						
35%	592	592	600	6	2550/45	3400/55	4250/75	4.4	F5	White
	290	592	600	3	1250/45	1700/55	2100/75	2.2	F5	
	592	592	600	8	2550/40	3400/50	4250/70	5.6	F5	
	290	592	600	4	1250/50	1700/50	2100/75	2.8	F5	

Special sizes available upon request.


F6 grade



Type	Dimensions(mm)				Rated air flow(m ³ /h)&Pa			Filtering area	EN7 79	Color
	Width	Height	Depth	Bags						
45%	592	592	600	6	2550/50	3400/60	4250/80	4.4	F6	Jacinth
	290	592	600	3	1250/50	1700/60	2100/80	2.2	F6	
	592	592	600	8	2550/45	3400/55	4250/75	5.6	F6	
	290	592	600	4	1250/45	1700/55	2100/75	2.8	F6	

Special sizes available upon request.

F7 grade:

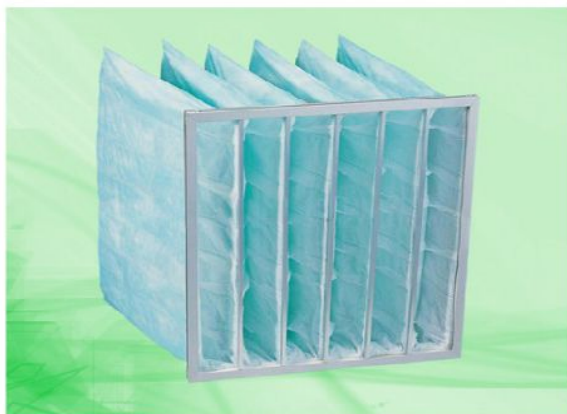

Type	Dimensions(mm)				Rated air flow(m ³ /h)&Pa			Filtering area	EN779	Color
	Width	Height	Depth	Bags						
65%	592	592	600	6	2550/58	3400/70	4250/105	4.4	F7	Green
	290	592	600	3	1250/58	1700/70	2100/105	2.2	F7	
	592	592	600	8	2550/52	3400/62	4250/95	5.6	F7	
	290	592	600	4	1250/52	1700/60	2100/95	2.8	F7	

Special sizes available upon request.

F8 Grade:



Type	Dimensions(mm)				Rated air flow(m ³ /h)&Pa			Filtering area	EN79	Color
	Width	Height	Depth	Bags						
85%	592	592	600	6	2550/67	3400/90	4250/115	4.4	F8	Pink
	290	592	600	3	1250/67	1700/90	2100/115	2.2	F8	
	592	592	600	8	2550/60	3400/80	4250/100	5.6	F8	
	290	592	600	4	1250/60	1700/80	2100/100	2.8	F8	

Special sizes available upon request.

F9 Grade:



Type	Dimensions(mm)				Rated air flow(m ³ /h)&Pa			Filtering area	EN79	Color
	Width	Height	Depth	Bags						
95%	592	592	600	6	2550/75	3600/126	5000/216	5.0	F9	Yellow
	290	592	600	3	1250/75	1800/127	2500/216	2.5	F9	
	592	592	600	8	2550/65	3400/50	4250/115	6.0	F9	
	290	592	600	4	1250/65	1700/50	2100/115	3.1	F9	

Special sizes available upon request.