


**Dong Chau Construction Environment Ltd., Co**  
16/27A Dinh Tien Hoang Street, Dakao Ward, District 1 Ho Chi Minh city  
Tel: +84 8 62702191 Fax: +84 8 39107692  
Email: [Sales@dongchau.net](mailto:Sales@dongchau.net) Web: [www.dongchau.net](http://www.dongchau.net)



[www.dongchau.net](http://www.dongchau.net)

**PANEL - HEPA AIR FILTER**  
**Meet Your All Requirement**

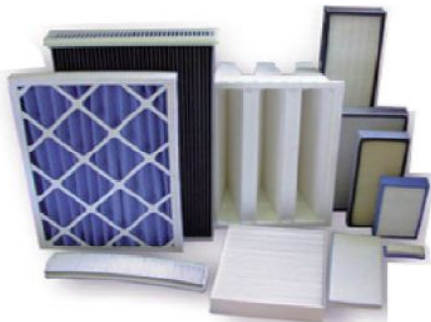




www.dongchau.net

## Plank Pre-Filter

### Features:

Low al resistance  
 Large dust holding capacity  
 Economical and practical  
 Washable

- Type: Synthetic fiber plank filter
- Frame: stainless steel or aluminum frame
- Media: Synthetic fiber
- Protect mesh : aluminum mesh or spray iron mesh
- EN779 class: G2,G3,G4
- Average arrestance:65%-85%,85%-90%,≥90%
- DIN53438 Non-flammability Standard: F1
- Final resistance: (suggest)100Pa-200Pa
- Max. air flow: 125% of the rated air flow
- Temp. resistance: 100<sup>0</sup>C
- Humidity:100%

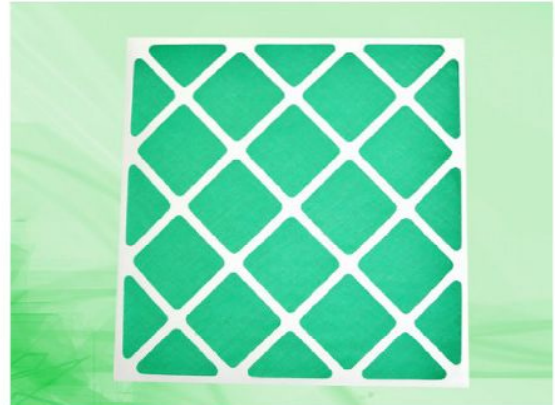

### Application:

Filter dust , pre-filter through air filter program

### Order information:

Type	Dimensions			Rated air flow(m3/h)	EN779	Media color	Initial pressure drop (Pa)
	Height(mm)	Width(m)	Thickness (mm)				
FRS-JS-1	595	595	21	3200	G2	White	≤15
FRS-JS-2	595	290	21	1600	G2	White	
FRS-JS-3	595	595	21	3000	G3	Blue and white	≤18
FRS-JS-4	595	290	21	1500	G3	Blue and white	
FRS-JS-5	595	595	21	2800	G4	Green and white	≤20
FRS-JS-6	595	290	21	1400	G4	Green and white	

Special sizes available upon request.