


Dong Chau Construction Environment Ltd., Co
16/27A Dinh Tien Hoang Street, Dakao Ward, District 1 Ho Chi Minh city
Tel: +84 8 62702191 Fax: +84 8 39107692
Email: Sales@dongchau.net Web: www.dongchau.net



www.dongchau.net

PANEL - HEPA AIR FILTER
Meet Your All Requirement

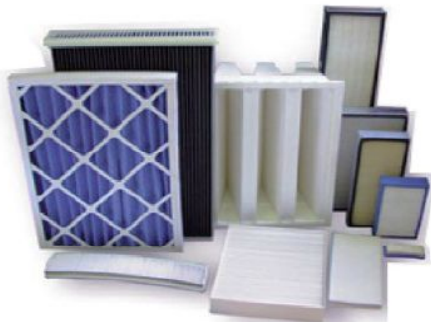




Metal Mesh Pre-Filter

Features:

High acid and alkali resistance
 Washable
 Low Initial resistance
 Firm structure

- Type: plank metal mesh pre-filter
- Frame: Galvanized iron, stainless steel or aluminum alloy frame
- Media: Multi-level structure, can increase the filtering area
- Protect mesh : aluminum or stainless steel mesh
- EN779 class: G2
- Average arrestance:65%-70%(ASHRAE52.1-1992)
- → EUROVENT4/5 class: EU 2
- → DIN53438 Non-flammability Standard: F1
- → Final resistance: (suggest)100Pa-200Pa
- → Max. air flow: 125% of the rated air flow
- → Temp. resistance: 300⁰ C

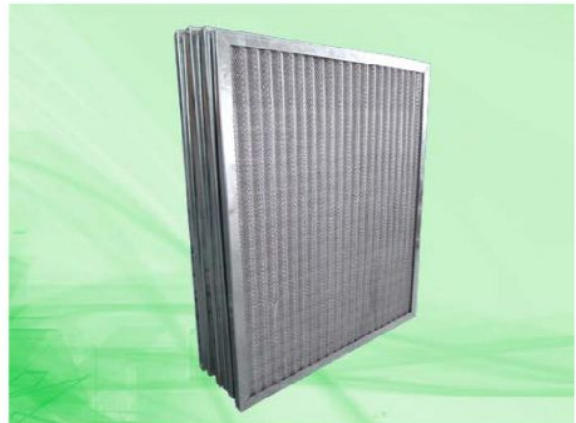

Application:

High temperature resistance, filter dust, used in the high temperature environment, pre-filter through air filter system

Order information:

Type	Dimension			Rated air flow(m3/h)	Initial pressure drop (Pa)
	Height(mm)	Width(mm)	Thickness(mm)		
FRS-JS-1	595	595	21	4000	≤25
FRS-JS-2	595	290	21	2000	
FRS-JS-3	595	595	25	3800	≤30
FRS-JS-4	595	290	25	1900	
FRS-JS-5	595	595	46	3600	≤35
FRS-JS-6	595	290	46	1800	

Special sizes available upon request.