


**Dong Chau Construction Environment Ltd., Co**  
16/27A Dinh Tien Hoang Street, Dakao Ward, District 1 Ho Chi Minh city  
Tel: +84 8 62702191 Fax: +84 8 39107692  
Email: [Sales@dongchau.net](mailto:Sales@dongchau.net) Web: [www.dongchau.net](http://www.dongchau.net)



[www.dongchau.net](http://www.dongchau.net)

**PANEL - HEPA AIR FILTER**  
**Meet Your All Requirement**

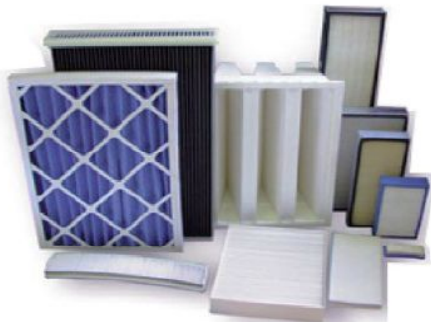



# Mini-Pleat Hepa Filter

**Features:**

- High efficiency(capturing 0.3µm particles)
- Low resistance, Thin thickness(minimum:25mm)
- Light weight, Easy to install
- Each filter has scanning test
- Type: high efficiency foldaway filter
- Frame: aluminum or galvanized frame
- Separation material: hot melt adhesive
- Media: fiber glass filter paper
- Final resistance: (suggested)600Pa
- Max. air flow: 125% of the rated air flow
- Temp. resistance: 80°C
- Humidity: ≤80%RH



**Application:**

It is applied to the FFU, cleaning equipment, blow of the cleanroom. And also be widely used in the electronic, semiconductor, hospital and food industry.

**Order information:**

Dimensions(mm)		Rated air flow(m <sup>3</sup> /h)	Initial pressure (Pa)	Filter efficiency %	Material			
Width*Height*Depth	h				Frame	Filters material	Partition material	Sealant
305*305*35		110	200	99.99%	Aluminum alloy Galvanized sheet	Fiberglass filter paper	Hot melt rubber	Polyurethane rubber
610*610*35		450						
915*610*35		680						
305*305*50		150						
610*610*50		700						
915*610*50		1100						
305*305*69		250						
610*610*69		1000						
915*610*69		1500						
305*305*80		300						
610*610*80		1300						

Special sizes available upon request.