


**Dong Chau Construction Environment Ltd., Co**  
16/27A Dinh Tien Hoang Street, Dakao Ward, District 1 Ho Chi Minh city  
Tel: +84 8 62702191 Fax: +84 8 39107692  
Email: [Sales@dongchau.net](mailto:Sales@dongchau.net) Web: [www.dongchau.net](http://www.dongchau.net)



[www.dongchau.net](http://www.dongchau.net)

**PANEL - HEPA AIR FILTER**  
**Meet Your All Requirement**

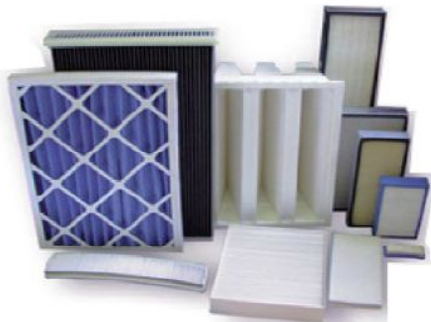



# ULPA Filter

**Features:**

- High efficiency(capturing 0.12 or above 0.12µm particles)
- Low resistance
- Light weight
- Thin thickness
- Easy to install
- Each filter has scanning test

- Type: high efficiency foldaway filter
- Frame: aluminum frame
- Separation material: hot melt adhesive
- Media: High performance imported fiber glass paper(0.12µm )
- Final resistance: (suggested)400Pa-600Pa
- Max. air flow: 125% of the rated air flow
- Temp. resistance: 80<sup>0</sup>C
- Humidity:≤80%



**Application:**

Be widely used in the place where the clean air is strictly required.

**Order Information:**

Dimensions(mm) Width*Height*Depth	Rated air flow(m <sup>3</sup> /h)	Initial pressure (Pa)	Filter efficiency %	Material			
				Frame	Filters material	Partition material	Sealant
610*610*50	470	≤220	>99.9995 %	Aluminum alloy	Fiberglass filter paper	Hot melt rubber	Polyurethane rubber
915*610*50	700						
610*610*69	600						
915*610*69	900						
610*610*90	800						
915*610*90	1200						
1220*610*100	1600						

Special sizes available upon request.