


Dong Chau Construction Environment Ltd., Co
16/27A Dinh Tien Hoang Street, Dakao Ward, District 1 Ho Chi Minh city
Tel: +84 8 62702191 Fax: +84 8 39107692
Email: Sales@dongchau.net Web: www.dongchau.net



www.dongchau.net

PANEL - HEPA AIR FILTER
Meet Your All Requirement

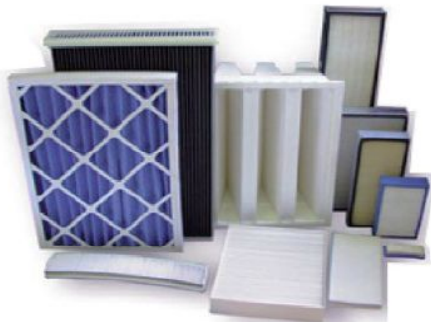



Washable Pre-Filter

Features:

Low initial resistance
 Large dust holding capacity
 Economical and practical

- Type: synthetic fiber foldaway filter
- Frame: aluminum or galvanized, with dismountable
- frame design
- Media: washable synthetic fiber, can wash 6-8 times
- EN779 class: G3,G4
- Average arrestance:84%-88%(ASHRAE52.1-1992)
- EUROVENT4/5 class: EU3,EU4
- DIN53438 Non-flammability Standard: F1
- Final resistance: (suggest) 200Pa-250Pa
- Max. air flow: 125% of the rated air flow
- Temp. resistance: ≤100⁰ C
- Humidity:100%



Application:

Filter dust, pre-filter through air filter program,
 also used in the clean room

Order information:

Type	Dimension(mm)			Rated air flow(m ³ /h)	Initial pressure drop (Pa)	EN779
	Height	Width	Depth			
FRS-KQX-1	595	290	46	850/1700	30/70	G3
FRS-KQX-2	595	595	46	1700/3400		
FRS-KQX-3	595	290	46	850/1700	40/80	G4
FRS-KQX-4	595	595	46	1700/3400		

Special sizes available upon request.